

# MARSTEK

## Venus E 3.0 APP USER MANUAL

| Published   | Version | Date       |
|-------------|---------|------------|
| Marstek EMS | V1.6.50 | 2025-10-14 |

|                                          |    |
|------------------------------------------|----|
| Venus E 3.0 APP USER MANUAL.....         | 1  |
| I . APP download .....                   | 4  |
| 1. Android: Google Play .....            | 4  |
| 2. IOS: APP Store.....                   | 4  |
| II. Account Registration / Login.....    | 5  |
| 1. Select Server .....                   | 5  |
| 2. Registration & Login.....             | 6  |
| 3. Forgot Password.....                  | 7  |
| 4. Account Management.....               | 8  |
| 4.1 Change Your Password.....            | 8  |
| 4.2 Delete Account.....                  | 9  |
| 4.3 Language Settings.....               | 10 |
| 4.4 App Version .....                    | 11 |
| III. Device Adding Process .....         | 12 |
| 1. Add via Bluetooth .....               | 12 |
| (1) Search for device .....              | 12 |
| (2) Naming & Network Configuration ..... | 13 |
| 2. CT Setup .....                        | 14 |
| (1) Set up Marstek CT .....              | 14 |
| (2) Set up CTs from other brands.....    | 16 |
| 3. Set Work Mode .....                   | 18 |
| 4. Firmware Upgrade .....                | 21 |
| IV. Home Page .....                      | 22 |
| 1. Communication Method .....            | 22 |

|                                                          |    |
|----------------------------------------------------------|----|
| (1) Bluetooth.....                                       | 22 |
| (2) Wi-Fi.....                                           | 22 |
| 2. Device Information.....                               | 22 |
| 3. CT Status .....                                       | 24 |
| V. Statistics.....                                       | 25 |
| 1. Profit .....                                          | 25 |
| 2. Power & Energy .....                                  | 26 |
| VI. Settings .....                                       | 27 |
| 1. Wi-Fi Configuration.....                              | 27 |
| 2. Set Fixed Electricity Price.....                      | 28 |
| 3. Time Setting.....                                     | 29 |
| 5. Factory Reset .....                                   | 31 |
| 7. Firmware Upgrade & Communication Module Upgrade ..... | 33 |
| 8. Device Sharing .....                                  | 34 |

## I . APP download

1. **Android:** Google Play

2. **IOS:** APP Store

You can also click the following link to download:

<https://eu.hamedata.com/ems/apk/marstek/index.html>

Or you can scan the QR code to download:




## II. Account Registration / Login

An account is required to access all features of the app, including device monitoring and statistics.



### 1. Select Server

- Select the server corresponding to your device location.
- You can choose servers from the top-right corner of the login page.

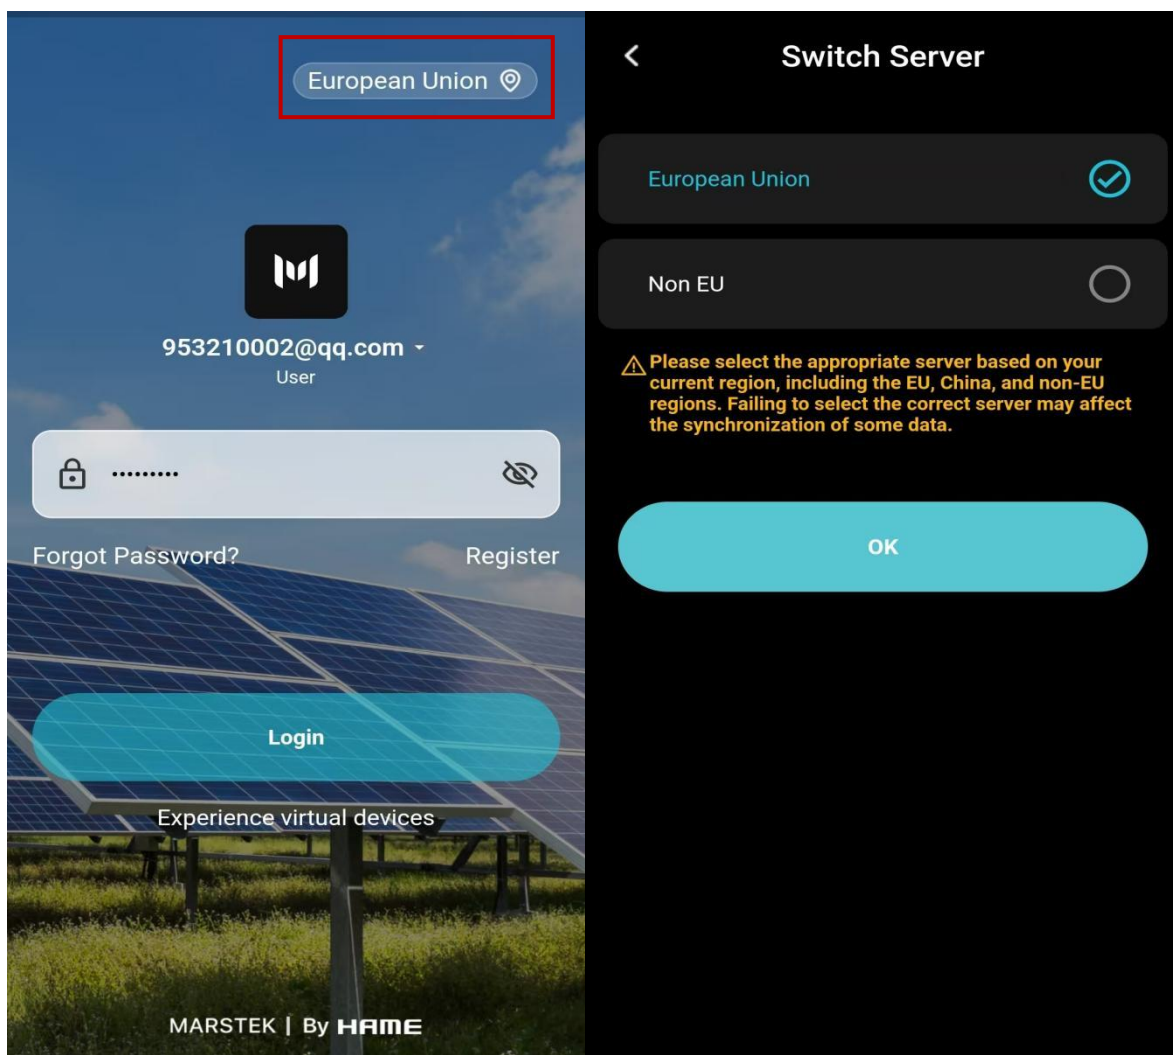



## 2. Registration & Login

- Enter Email + Verification Code + Password to register.
- Use your registered email + Password to log in.
- **Note:** Make sure the server matches the one used during registration.

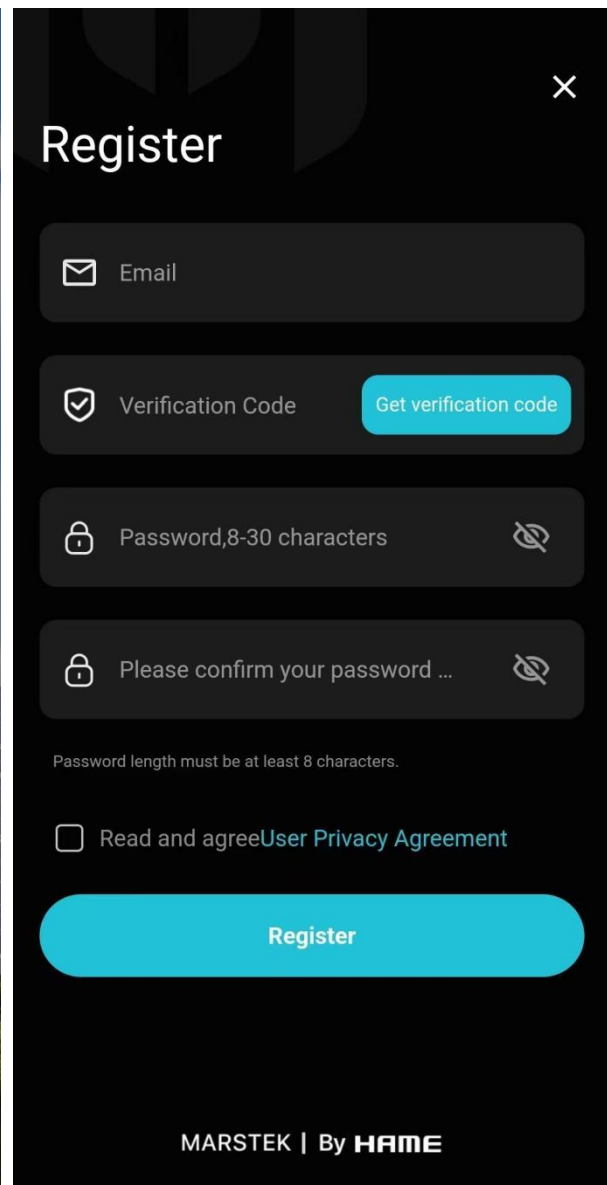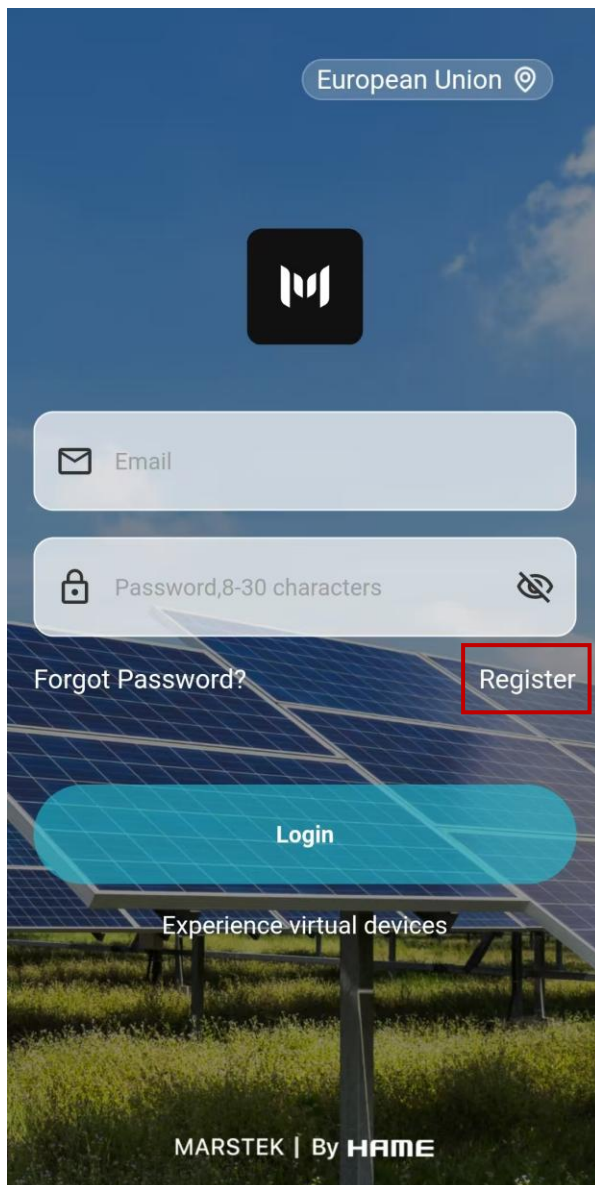

## 3. Forgot Password


- Tap **“Forgot Password”** → Enter Email → Enter Verification Code → Set New Password.

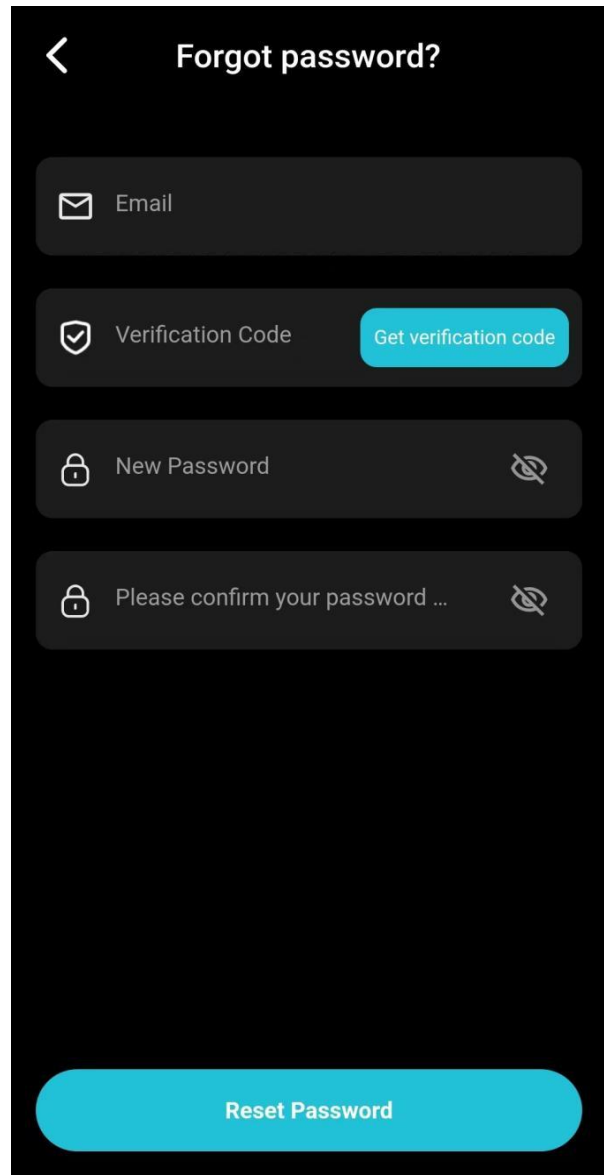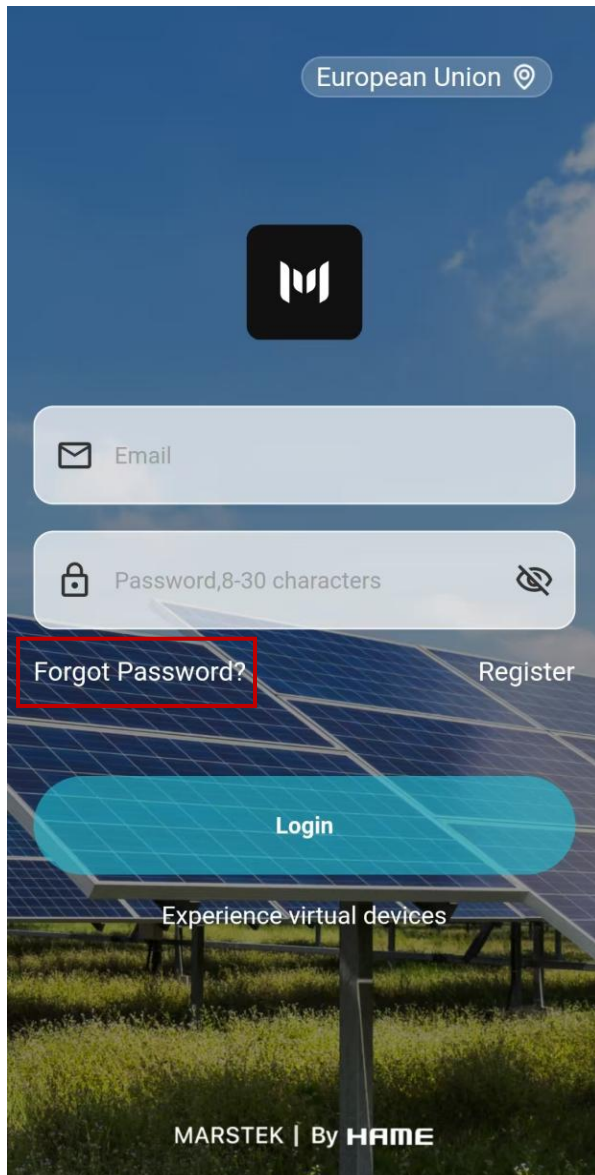

## 4. Account Management

### 4.1 Change Your Password

Change Password → Enter new password (8–30 characters).

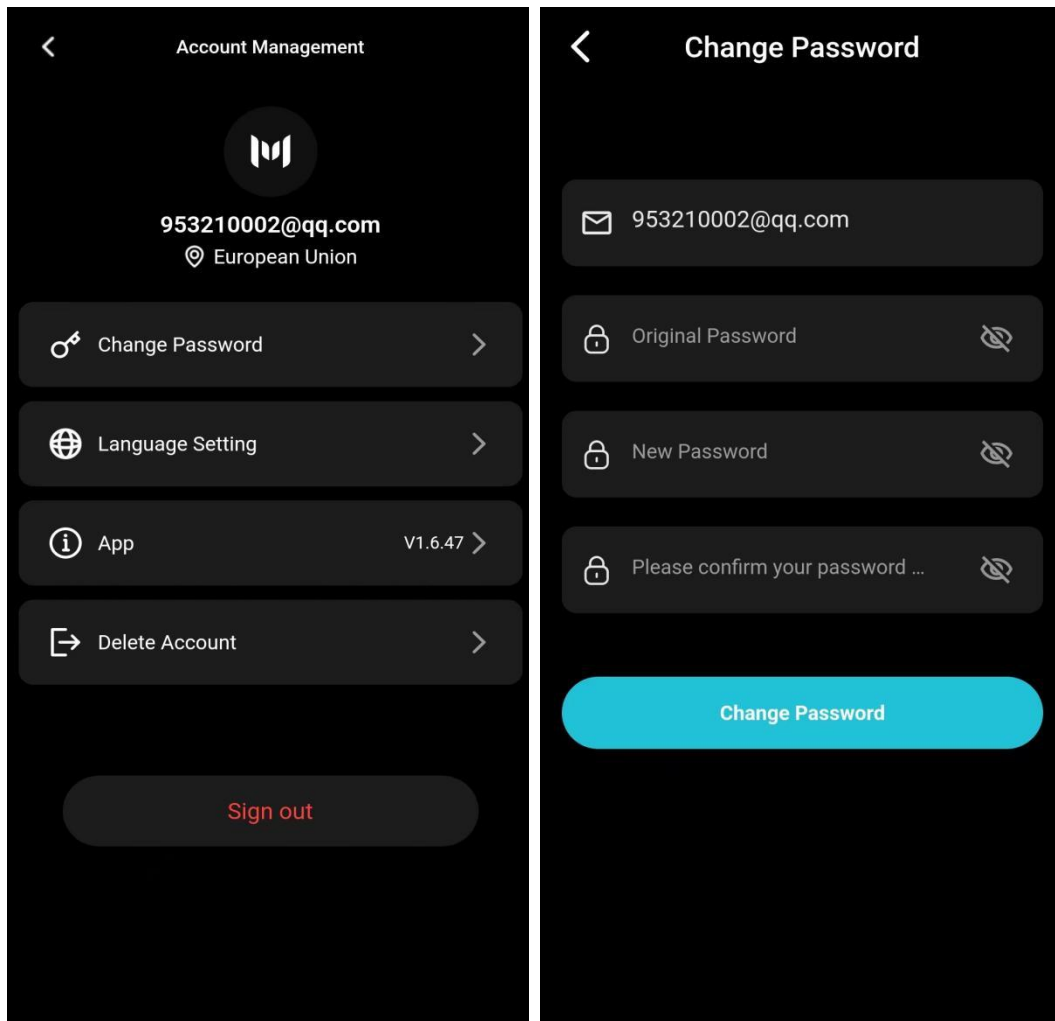



## 4.2 Delete Account

Delete Account → Agree to terms, select reason, confirm.

**Note:** Once confirmed, the account will be permanently deleted and cannot be used again. A new account must be registered to continue using the App.

**Delete Account**

**User Cancellation Agreement**

Before canceling your account, please fully read, understand, and agree to the following items before confirming the cancellation:

- 1. Cancellation Notice**  
The account is only for use in the Marstek App. After deleting the account, you will no longer be able to log in to the Marstek App. This will not have any impact on your email itself.
- 2. Cancellation Process**  
Log out of your account by entering the password confirmation in the account cancellation interface after selecting "Log Out" in the personal account section of the Marstek App device screen
- 3. Special Reminder**  
Account cancellation will not affect your email. Before canceling your account, please delete all devices under the account first. Thank you for using Marstek. If you have any suggestions or feedback about the device, please provide it in the Help & Feedback section before cancellation, so we can continuously improve our products

☐ I have read and agree to the User Cancellation Agreement.

Next

**Delete Account**

**Reason for Account Cancellation**

Thank you for once choosing MARSTEK. Please select the reason for cancellation to help us better improve the experience:

☐ Unbind email

☒ Change account usage

☐ Other reasons

Please enter other reasons or feedback:

0/500

Next


## 4.3 Language Settings

Language Setting → 17 languages available. Defaults to phone system language.

| < Language Setting | < Language Setting |
|--------------------|--------------------|
| Follow system      | Ελληνικά<br>el     |
| 中文<br>zh           | Français<br>fr     |
| English<br>en ✓    | Italiano<br>it     |
| Deutsch<br>de      | Svenska<br>sv      |
| Nederlands<br>nl   | Ελληνικά<br>el     |
| Français<br>fr     | Español<br>es      |
| Italiano<br>it     | Polski<br>pl       |
| Svenska<br>sv      | Română<br>ro       |
| Ελληνικά<br>el     | Українська<br>uk   |
| Español<br>es      | Русский<br>ru      |
| Polski<br>pl       | Čeština<br>cs      |
| Română<br>ro       | Magyar<br>hu       |
| Українська<br>uk   | Filipino<br>fil    |
|                    | 日本語<br>ja          |

## 4.4 App Version

App Version → Check current version; update available when red dot appears.

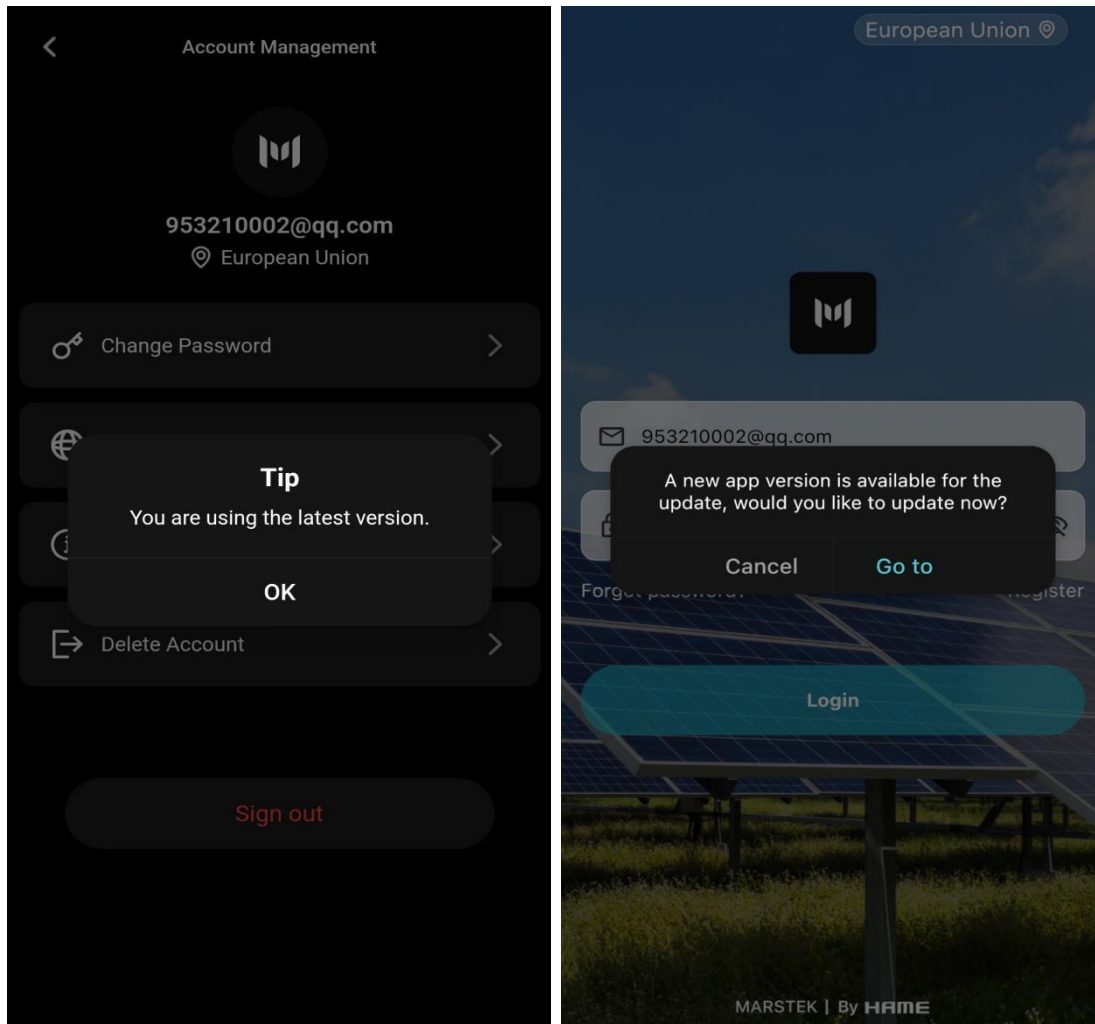


## III. Device Adding Process

### 1. Add via Bluetooth

#### (1) Search for device

On the Device List page → Tap “+ Add Device” → App scans nearby devices → Select device to bind.

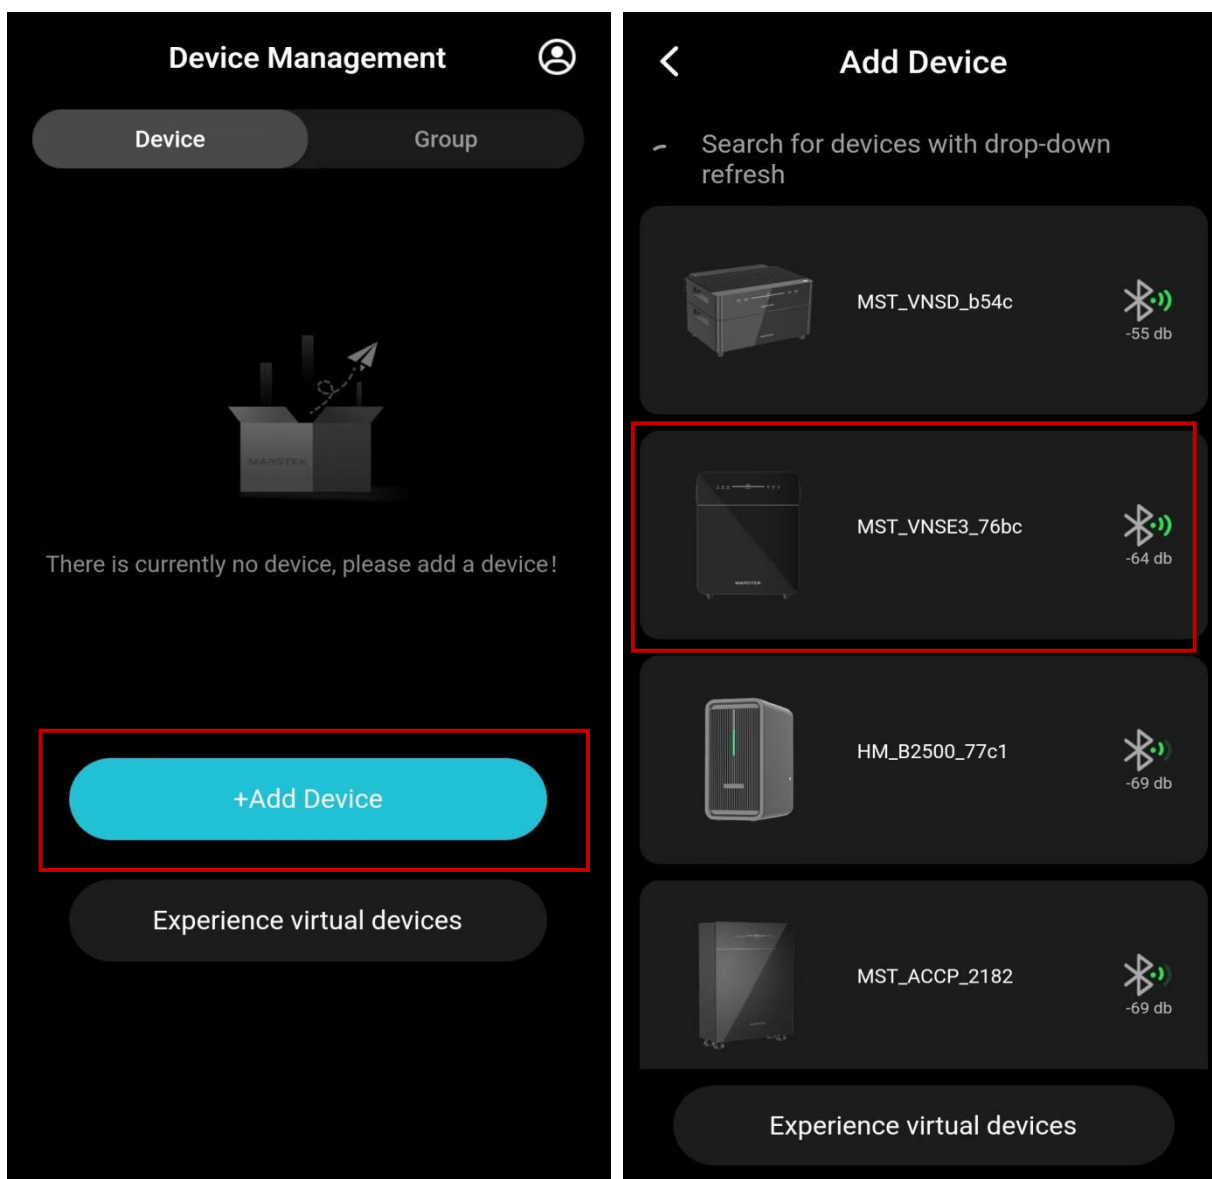


## (2) Naming & Network Configuration

After device binding → App goes to Wi-Fi Setup page.

Select Wi-Fi → Enter Password → Tap Next.


**Note:** Ensure Bluetooth remains connected during network configuration.

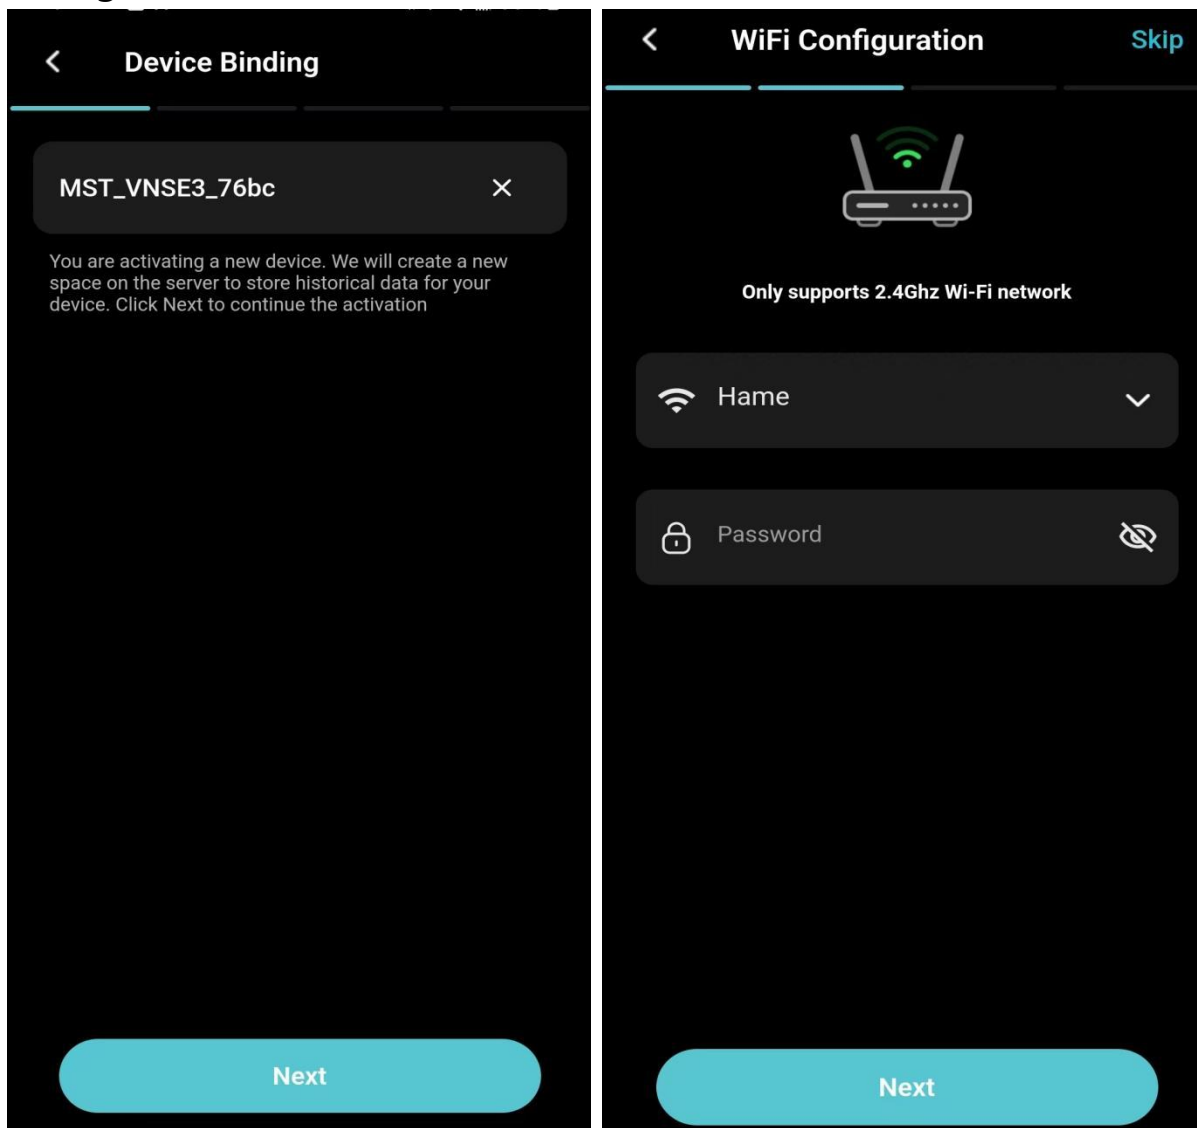


## 2. CT Setup

### (1) Set up Marstek CT

- You can add Marstek CTs (e.g., CT002, CT003) by tapping **Click to add CT device**. Once added, CT settings can be configured directly.
- If the CT has no network connection, the App will configure the CT to use the same network as the device.
- You may use the default CT name or edit it (recommended: keep names short).

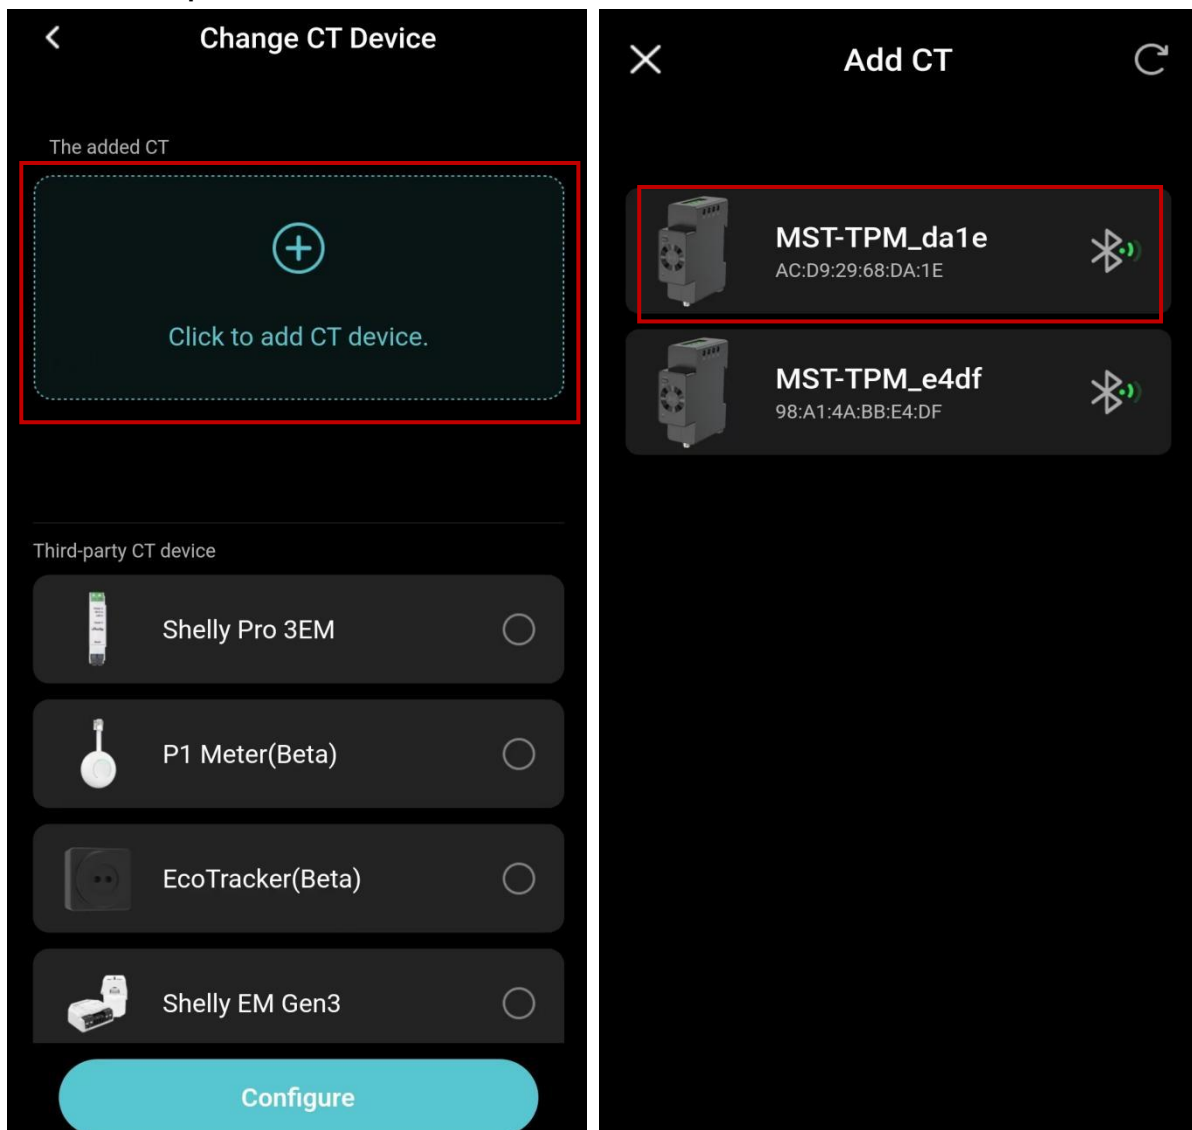


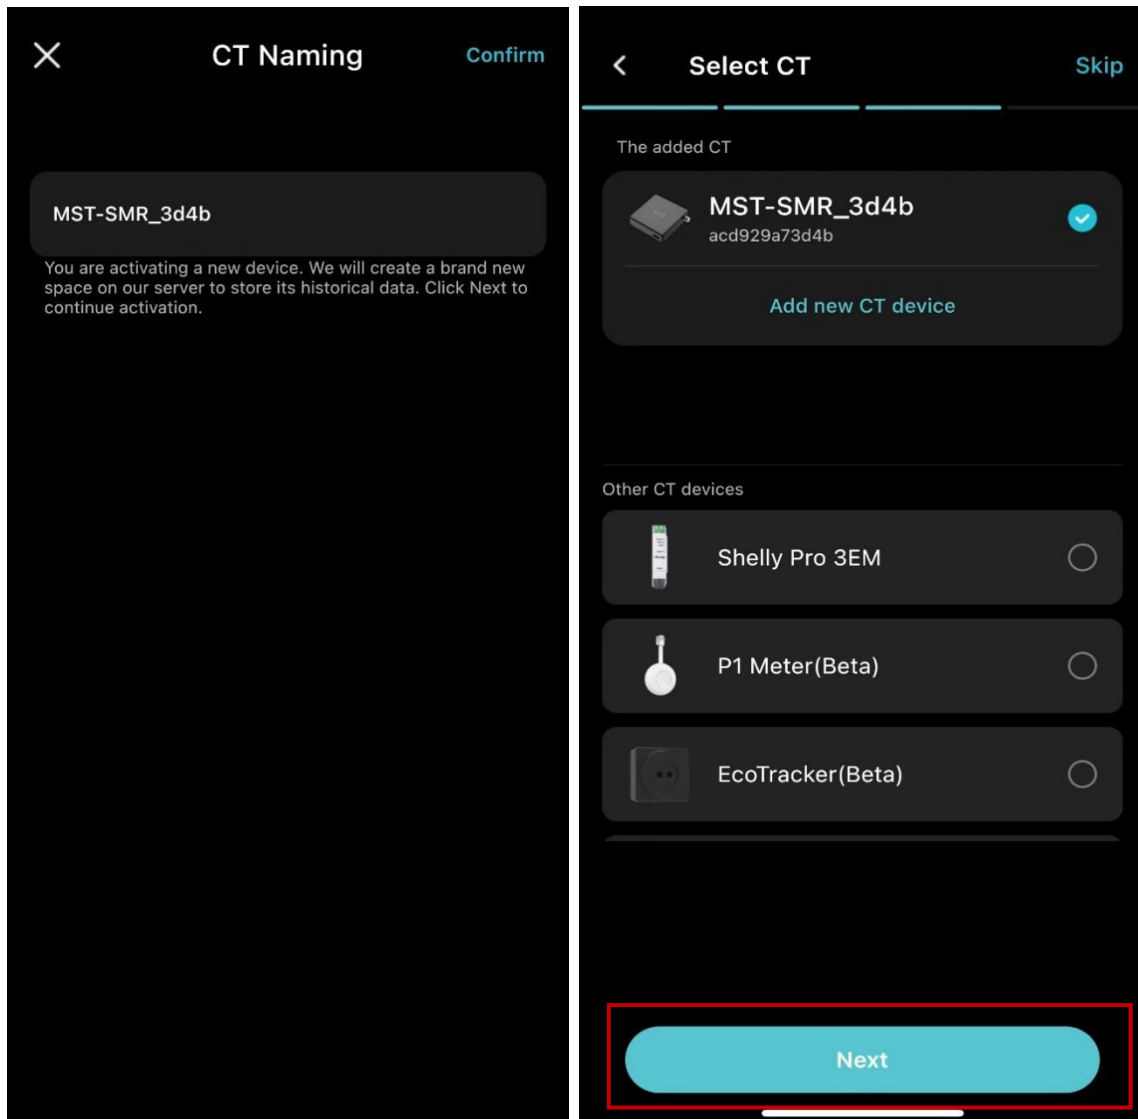

## (2) Set up CTs from other brands

### 1). Shelly Series or Similar


- Select your CT model (e.g., Shelly Pro 3EM) and tap **Configure** to set up.
- **Note:** Ensure the meter is connected to the same local network as the device.

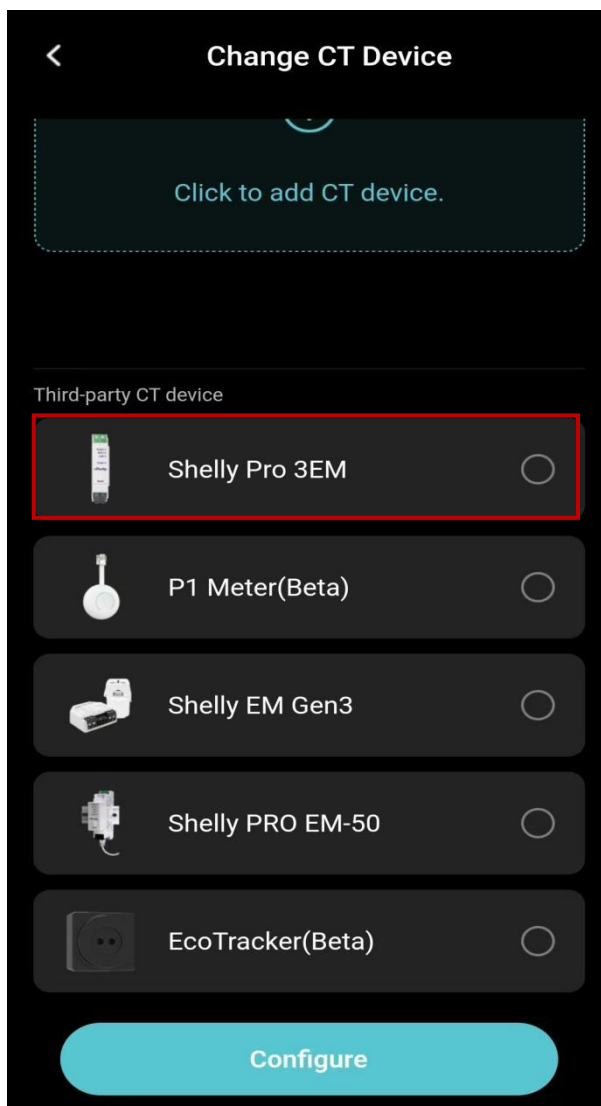




## 2). P1 Meter / Ecotracker

- Select your CT model (e.g., P1 Meter) and tap **Configure** to set up.
- During configuration, ensure that the mobile phone, CT, and device are all within the same network.
- **Note:** For P1 and Ecotracker, you need click the option to add your device then return to the setup page to configure.

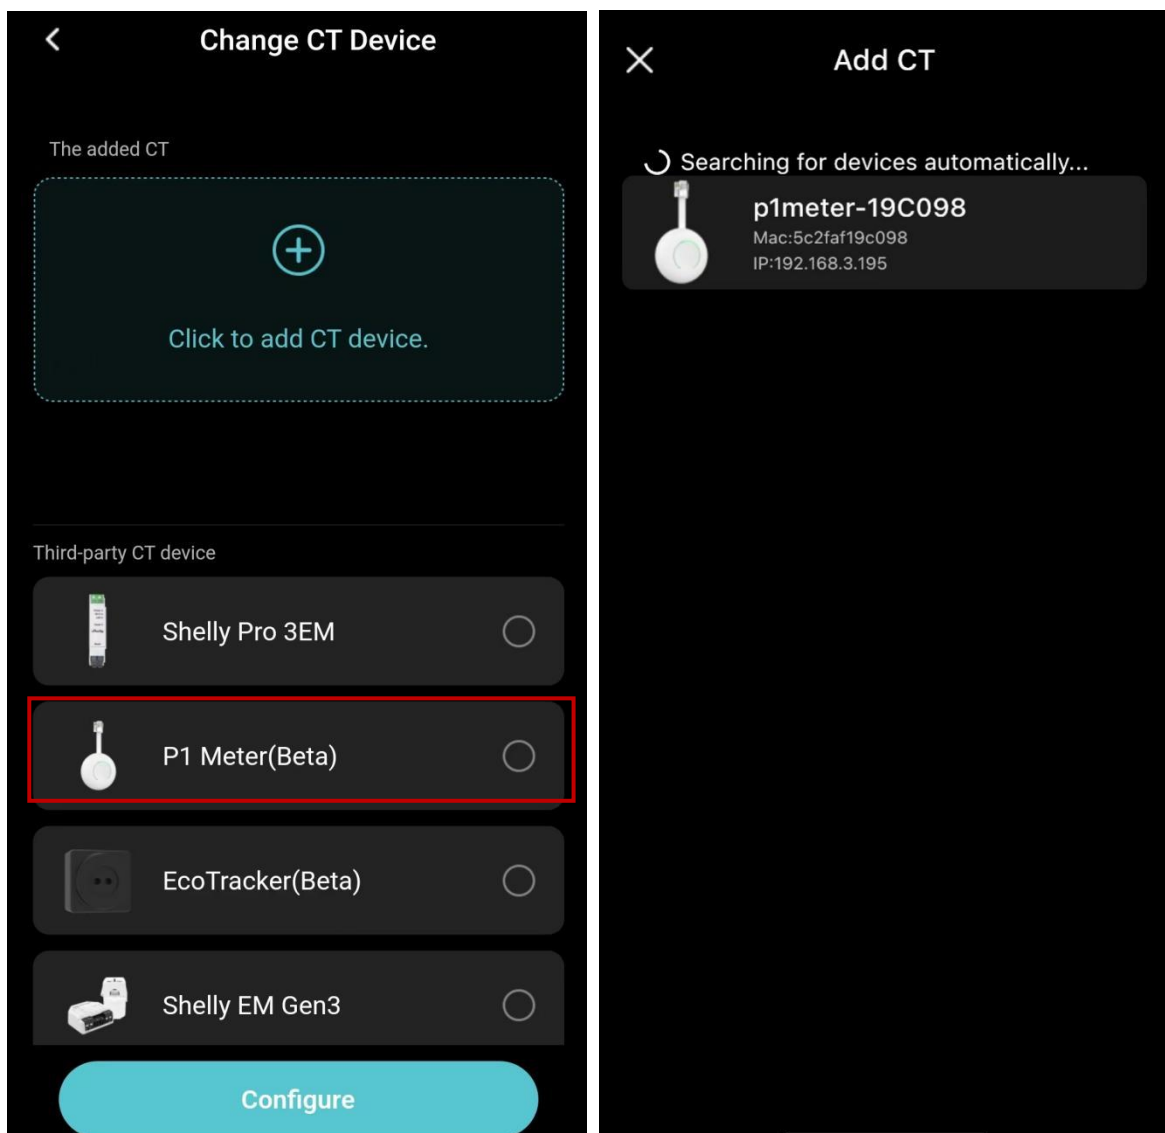


### 3. Set Work Mode

- **Self-Consumption:** Your device will discharge according to the load consumption and store the excess electric energy from the solar system (for homes with solar system).

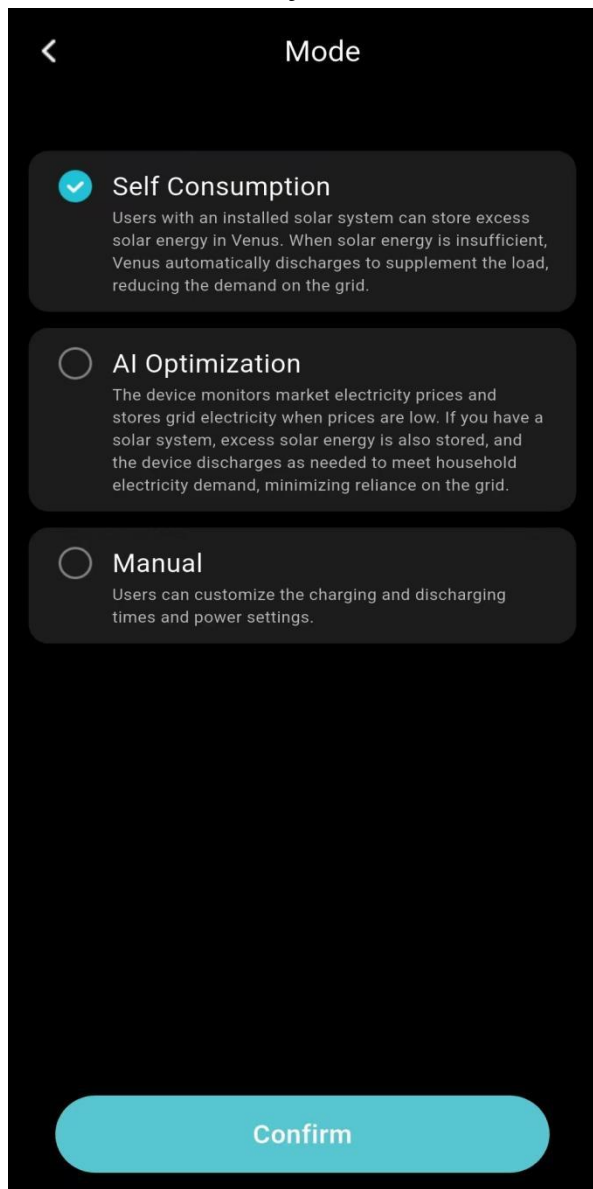


- **AI Mode:** Your device will charge at the lowest price according to your electricity provider. This mode also includes the function of Self Consumption.

**Note:** 4 power suppliers available to choose from; To select NordPool supplier, you need to select the region where the current equipment is located.

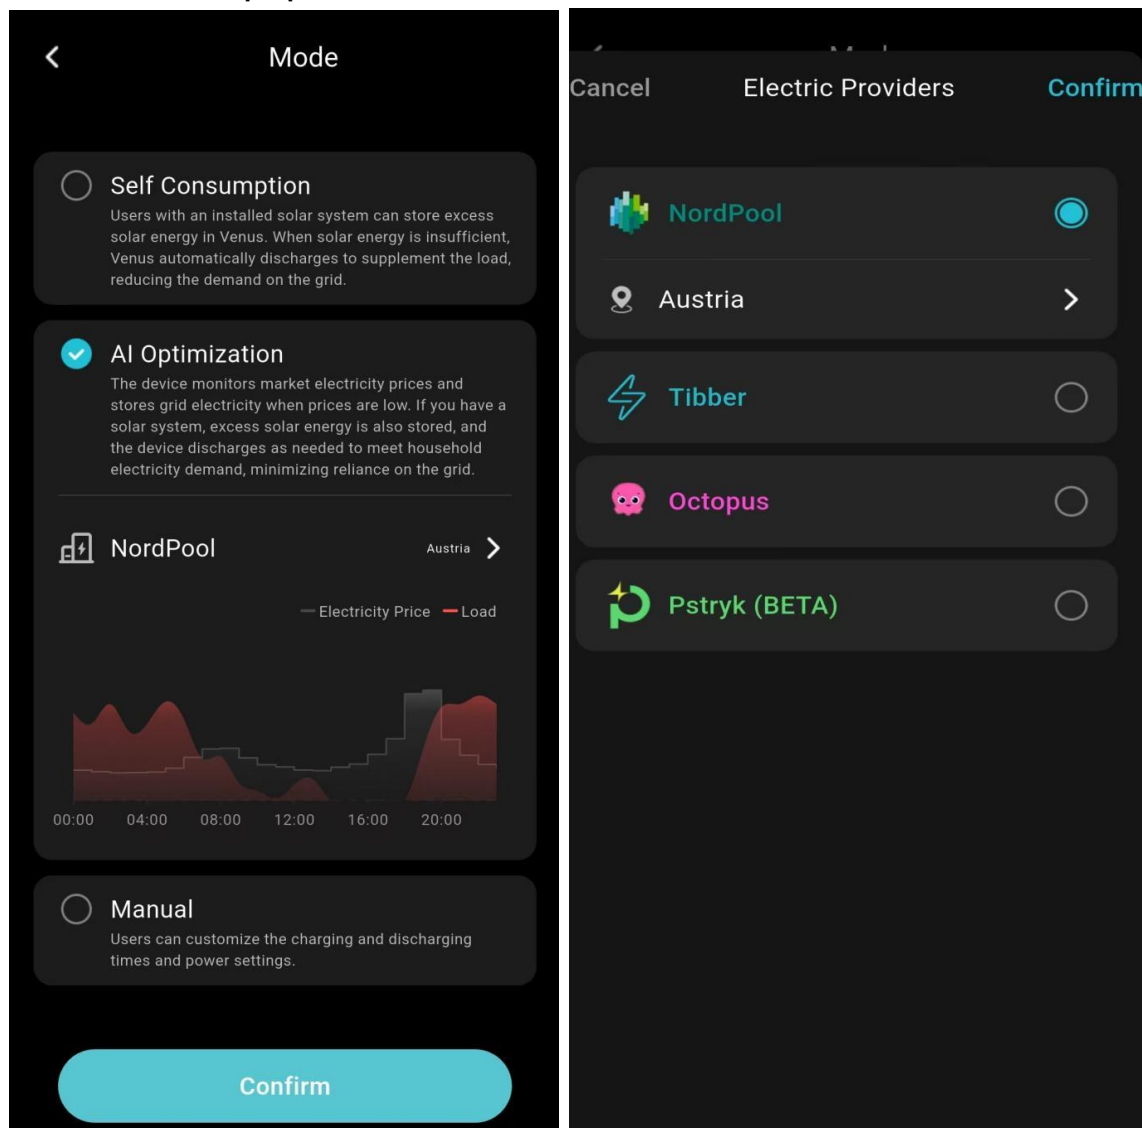


- **Manual Mode:** Set discharge/charge time schedule, power and days for working automatically.

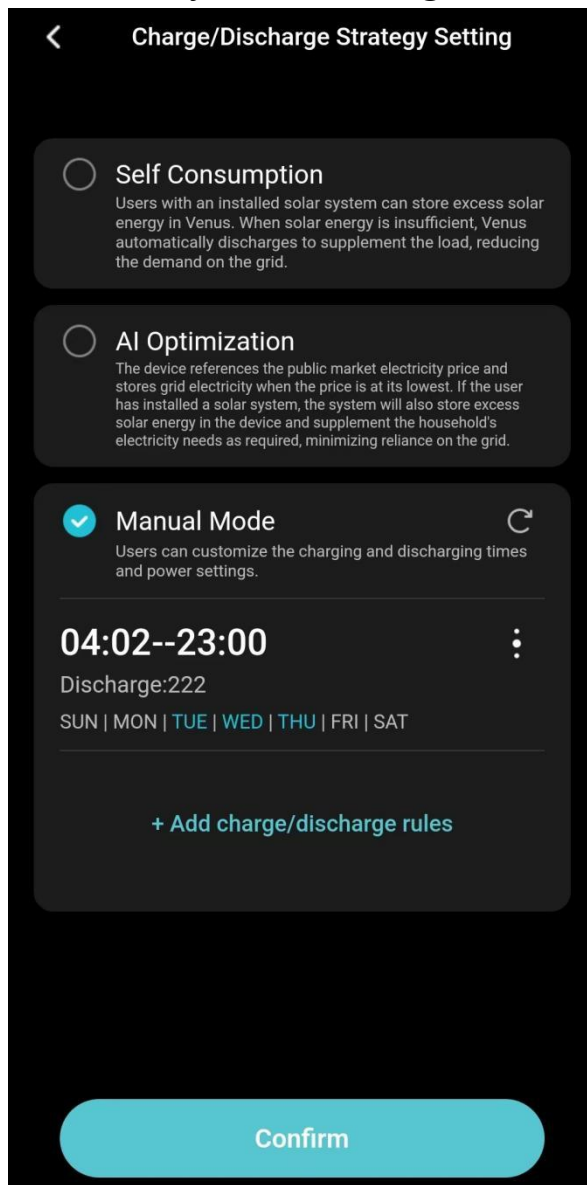

## 4. Firmware Upgrade

After network configuration, if a new firmware version is available, an upgrade prompt will appear. Tap to upgrade directly.

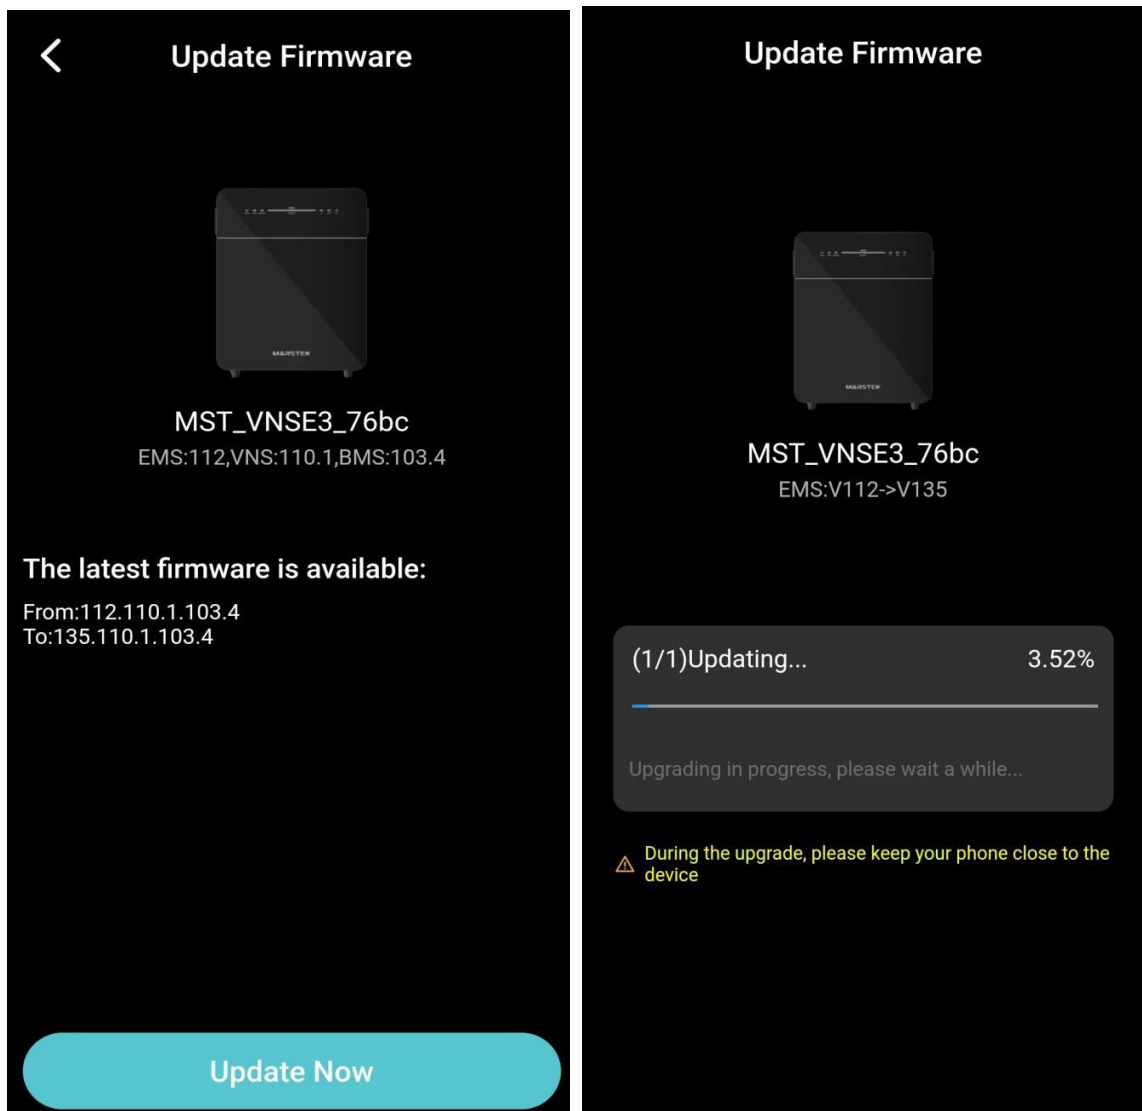

## IV. Home Page

### 1. Communication Method

The APP supports device communication via:

#### (1) Bluetooth

- **Green:** Bluetooth communication is active.
- **Gray:** Bluetooth disconnected, communication unavailable.

#### (2) Wi-Fi

If Bluetooth is disconnected:

- **Green Wi-Fi:** Wi-Fi communication active.
- **Gray Wi-Fi:** Device Wi-Fi disconnected.


**Note:** Either Bluetooth or Wi-Fi is green, the App can communicate with the device.

### 2. Device Information

On the Device Page, you can check:


- Device status: Charging / Discharging / Standby / Backup / Bypass
- Power input & output
- Cumulative discharge
- Battery charge level
- Work mode
- CT status (Green = connected; Gray = disconnected)

You can also switch between different working modes.

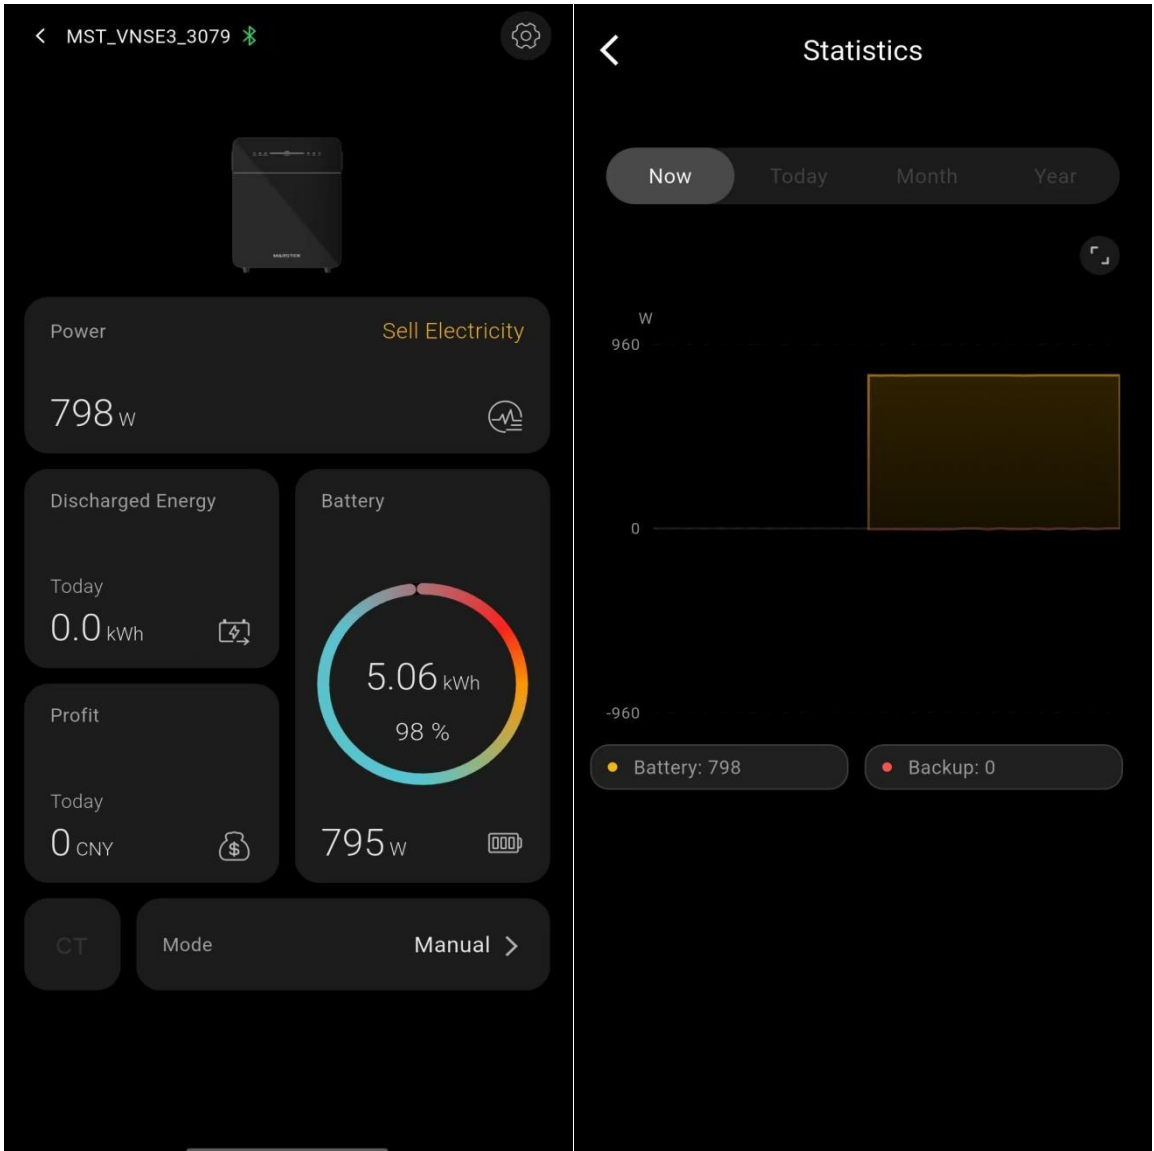

## 3. CT Status

- Tap **CT** to enter the CT settings page.
- Choose output power reference: Single phase/Three-Phase Sum. Or you can tap Auto Diagnosis to let the CT identify work mode.
- When CT is connected, you can also perform a wiring sequence diagnosis.

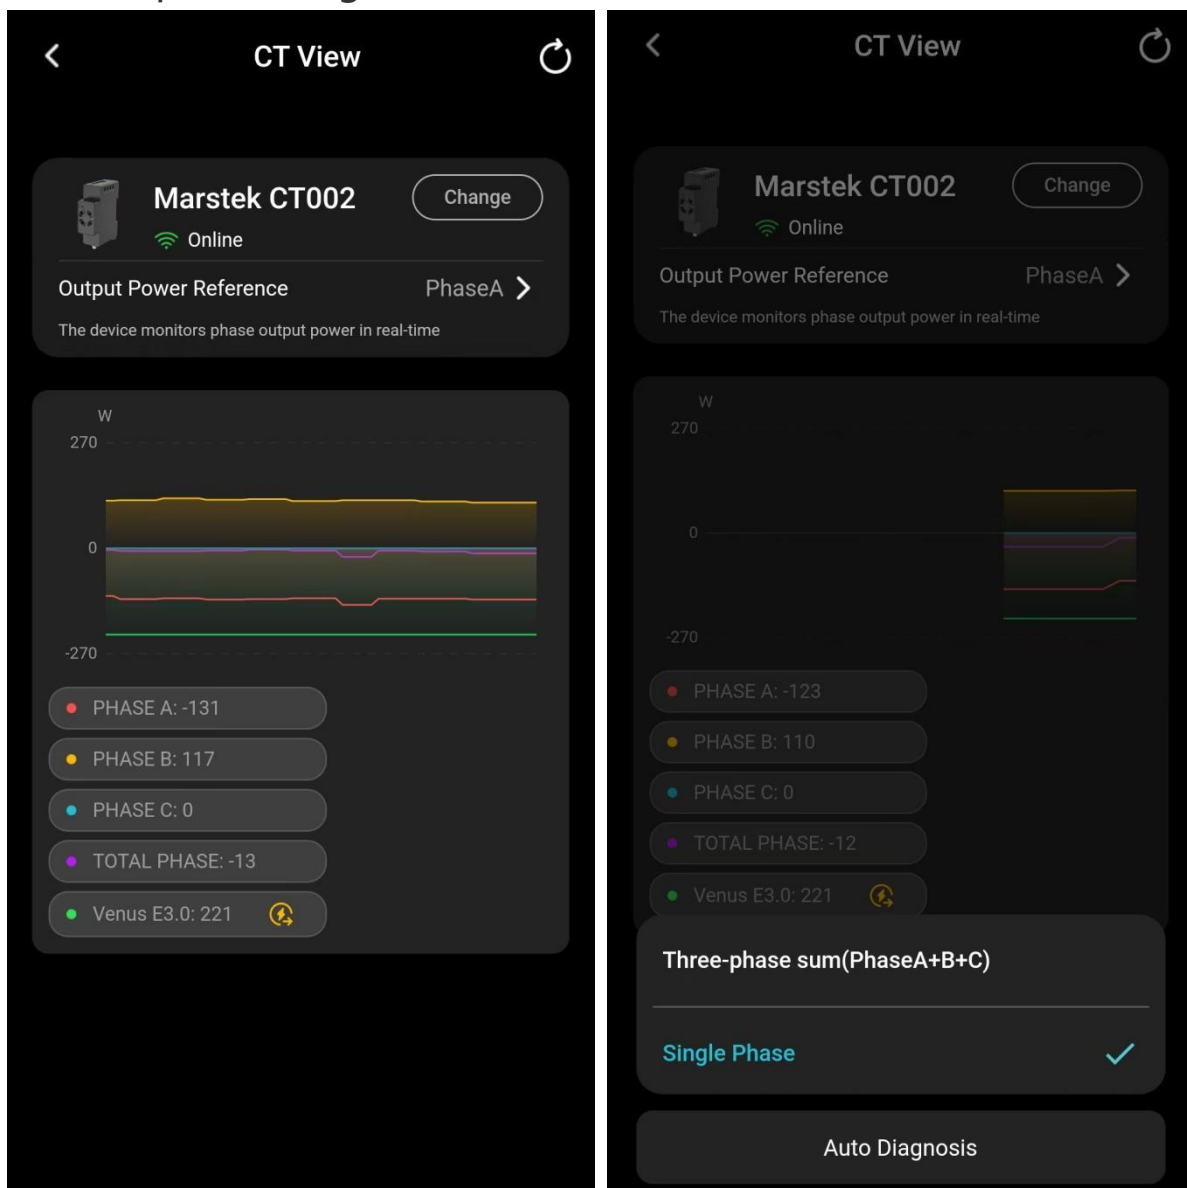




V. Statistics


1. Profit

- Tap **Profit** to view profit statistics.
- In **AI Mode**, the daily electricity price curve is also displayed.

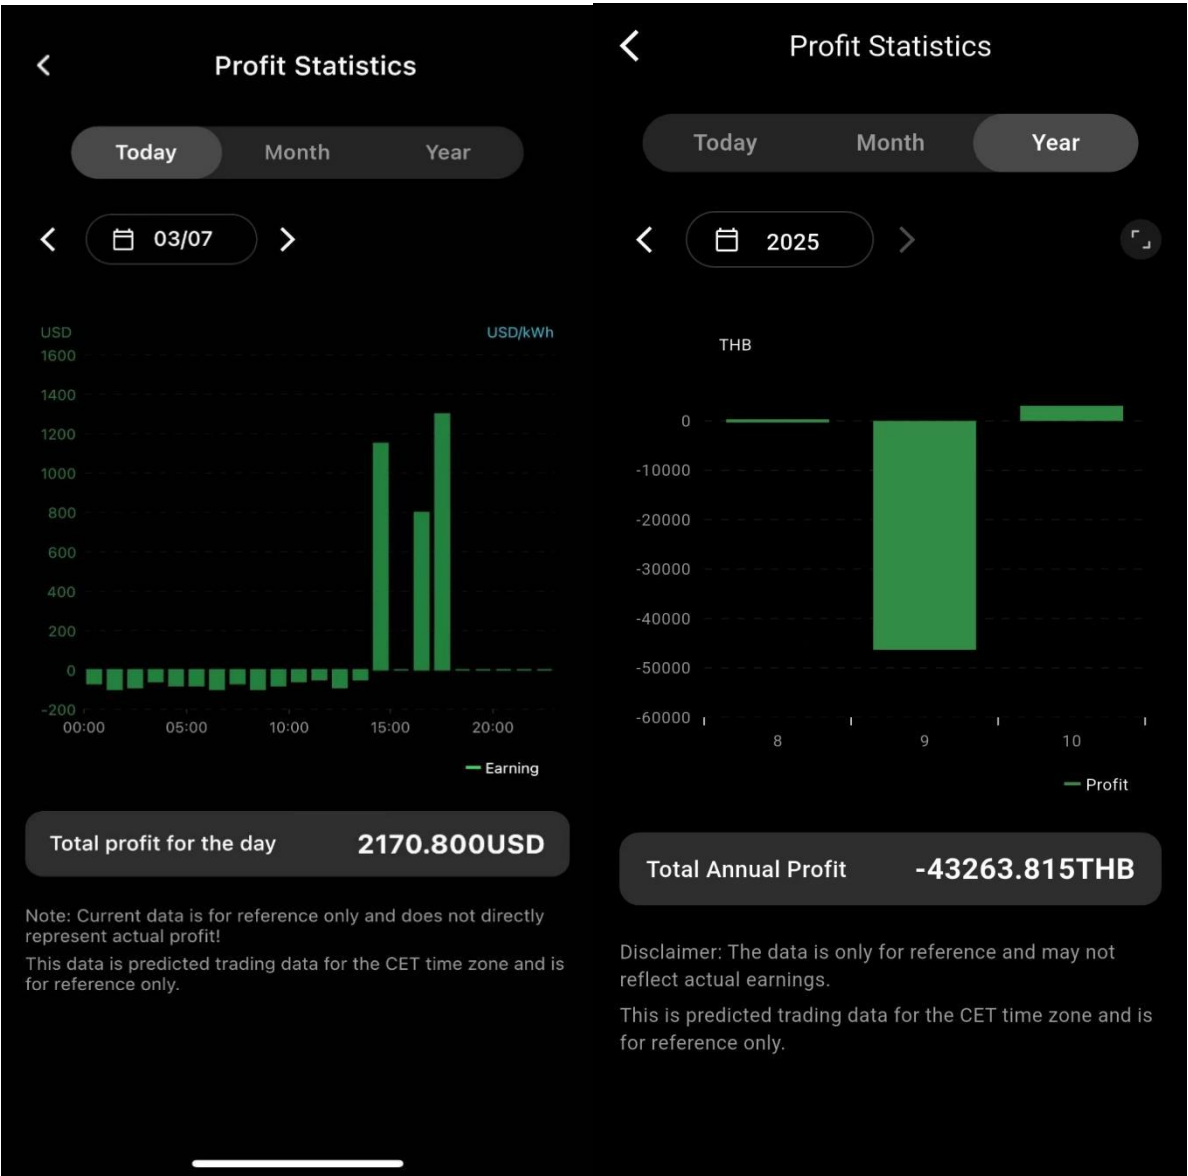

## 2. Power & Energy


- Tap **Cumulative Discharge** to view historical data.
- Includes charge/discharge power and energy by **day, month, or year**.

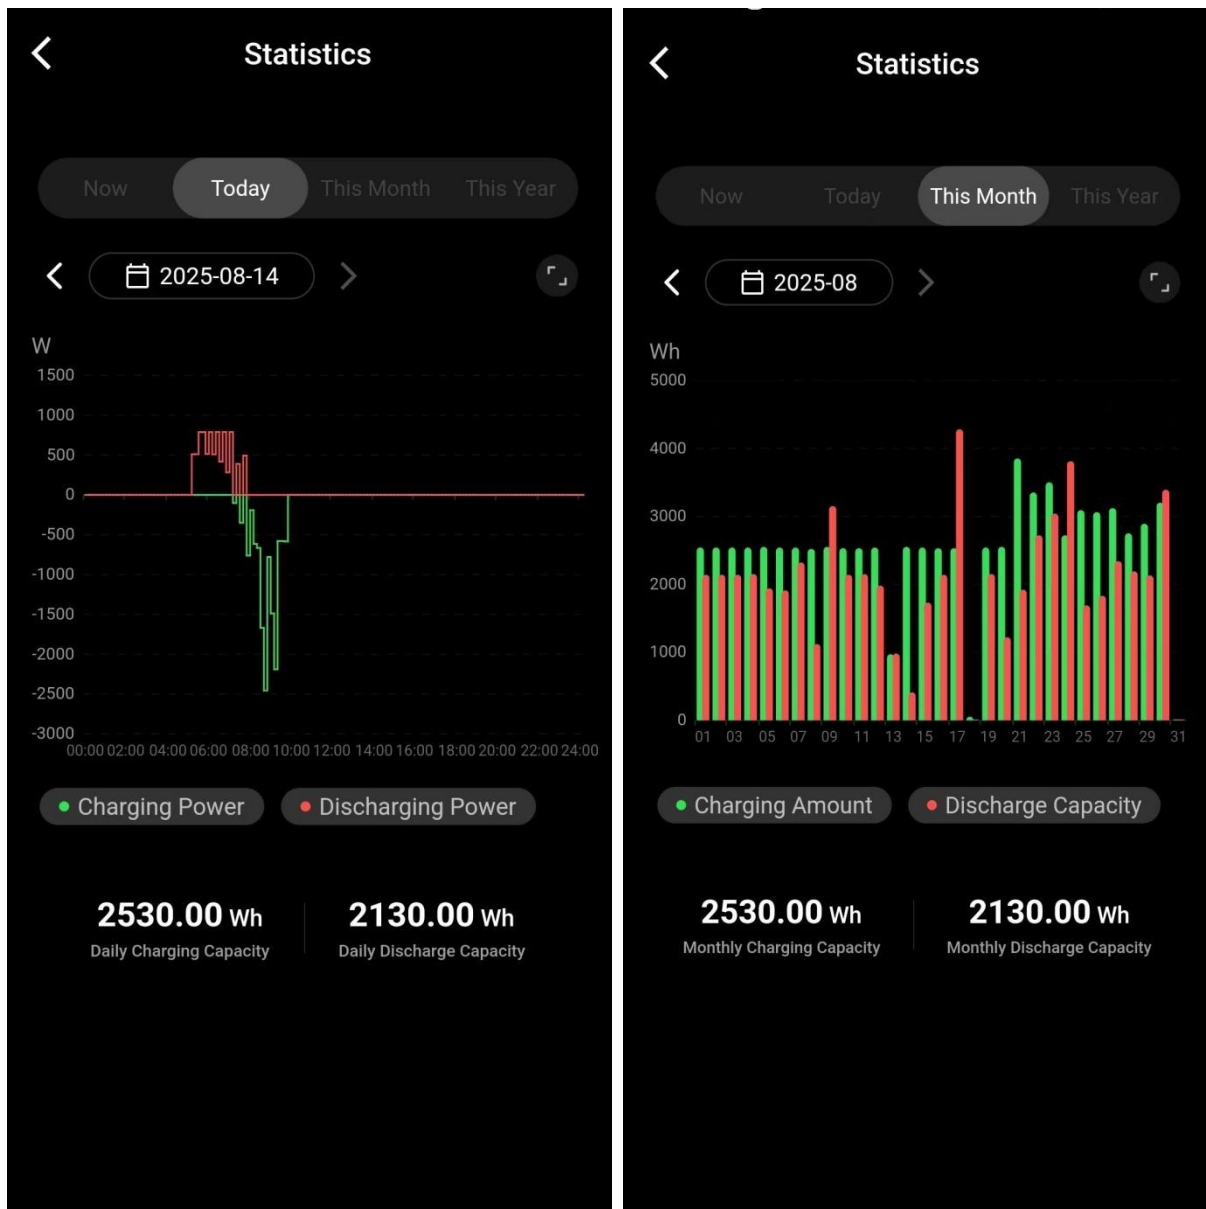

## VI. Settings

### 1. Wi-Fi Configuration

Configure the device network (requires active Bluetooth connection).

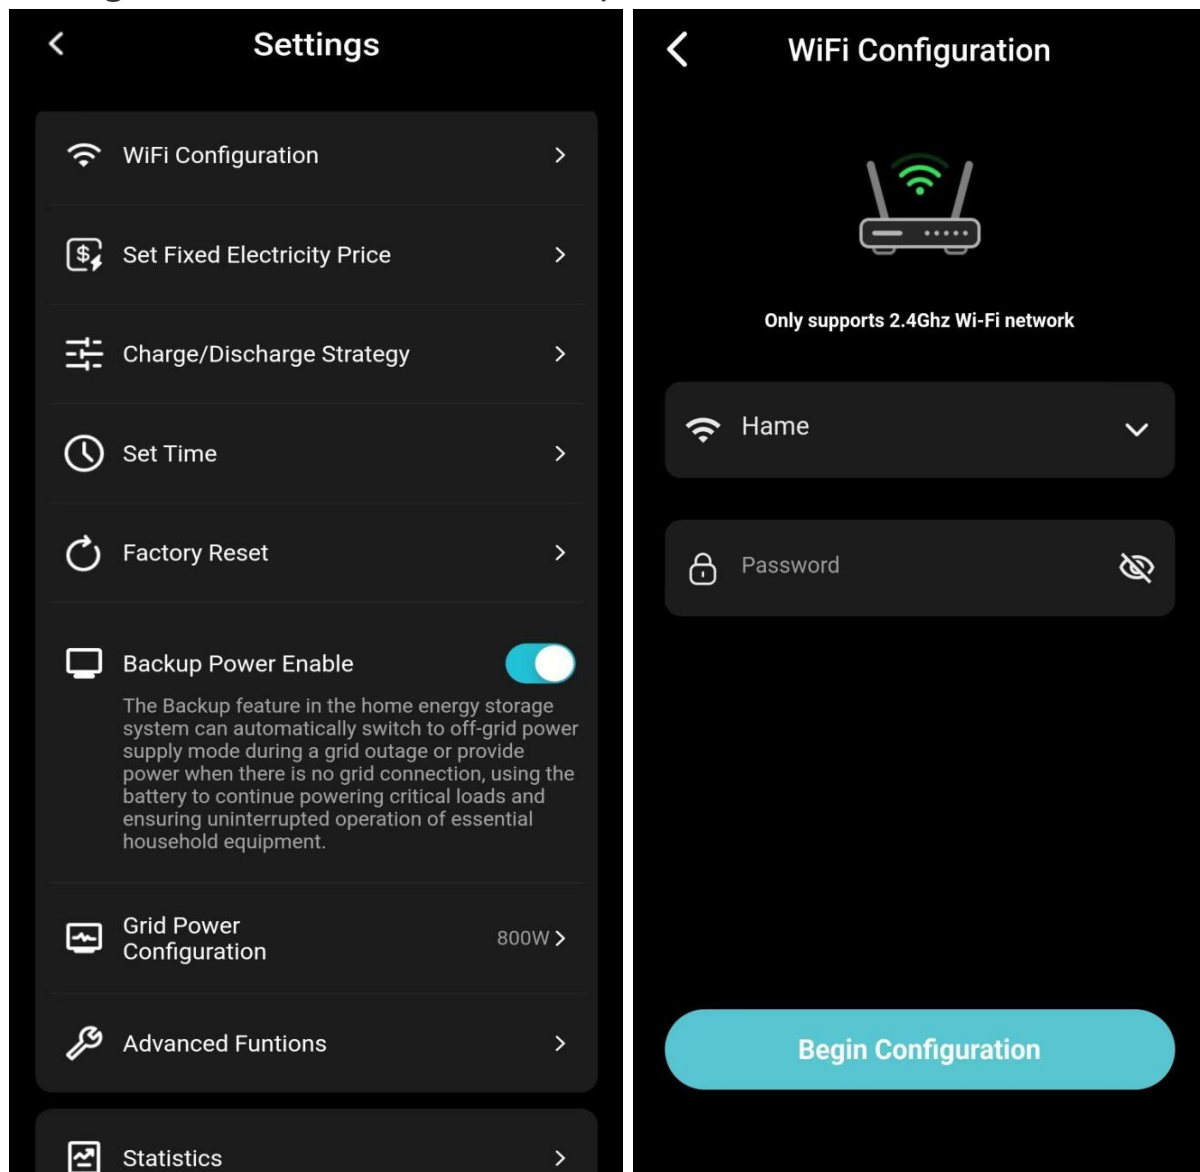

## 2. Set Fixed Electricity Price

Set currency unit and charge/discharge price. Profits in Manual or Automatic Mode will be calculated based on this price.

< Set Fixed Electricity Price

Currency  
EUR >

Charging price(EUR/kWh)  
**9.700**


Discharging price(EUR/kWh)  
**9.100**

The current set price is only used as a reference for the statistical gain of the "Self-Consumption Mode" and "Manual Mode" in the "Charging and Discharging Strategy".

OK


## 3. Time Setting

Set time for the device. When your device is connected to the Internet, the time will be set automatically.

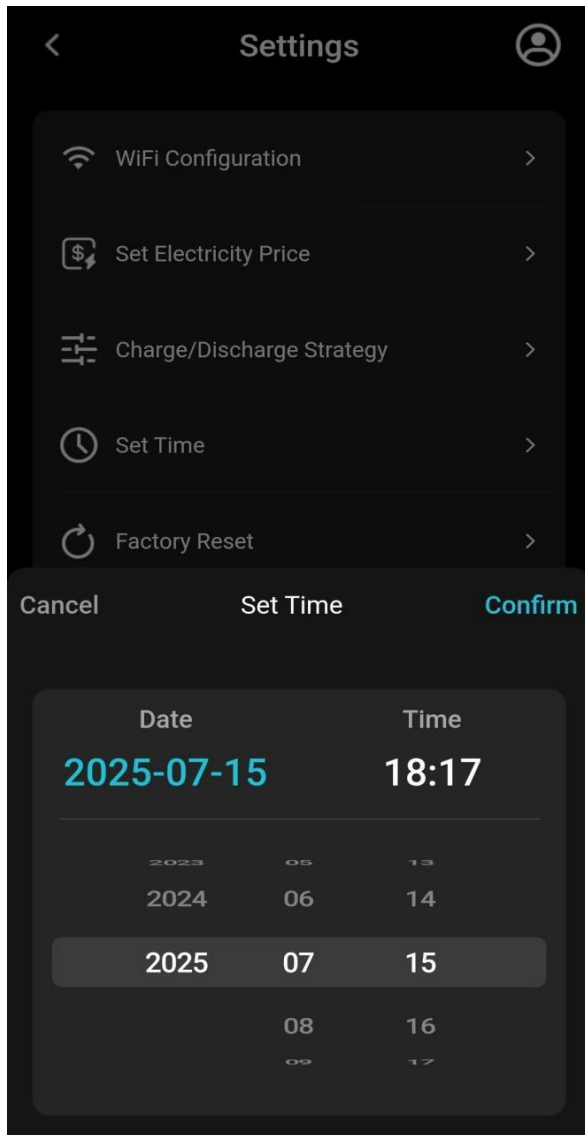


## 4. Backup Power Enable

Turn on this switch to power your household loads without grid input.

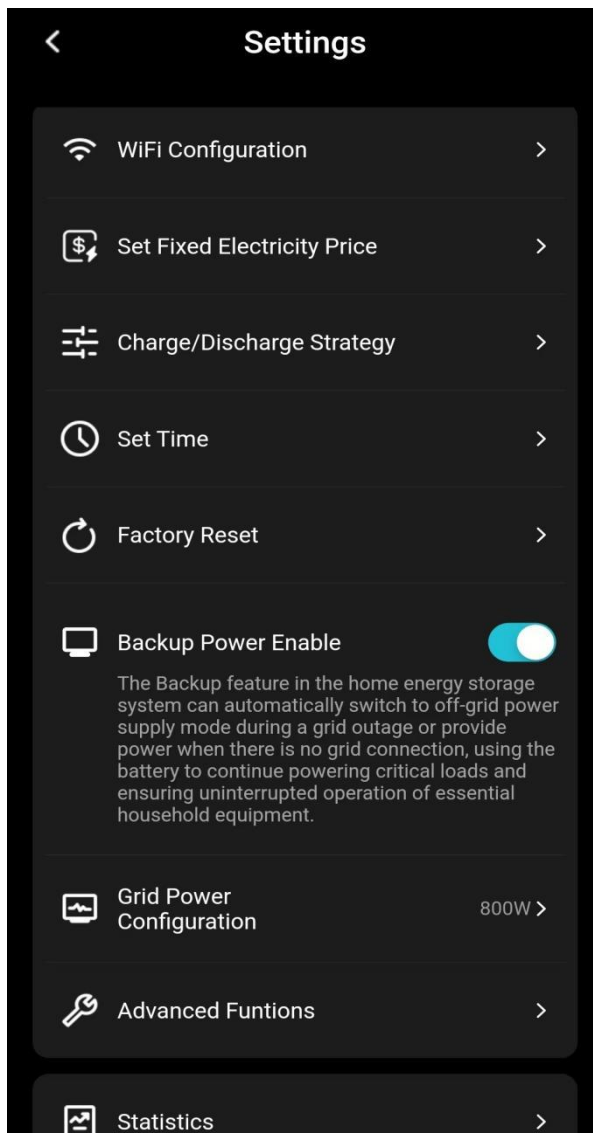


## 5. Factory Reset

- **Reset and Clear All Data:** Clears cumulative energy data.
- **Reset and Keep Data:** Retains cumulative energy data.

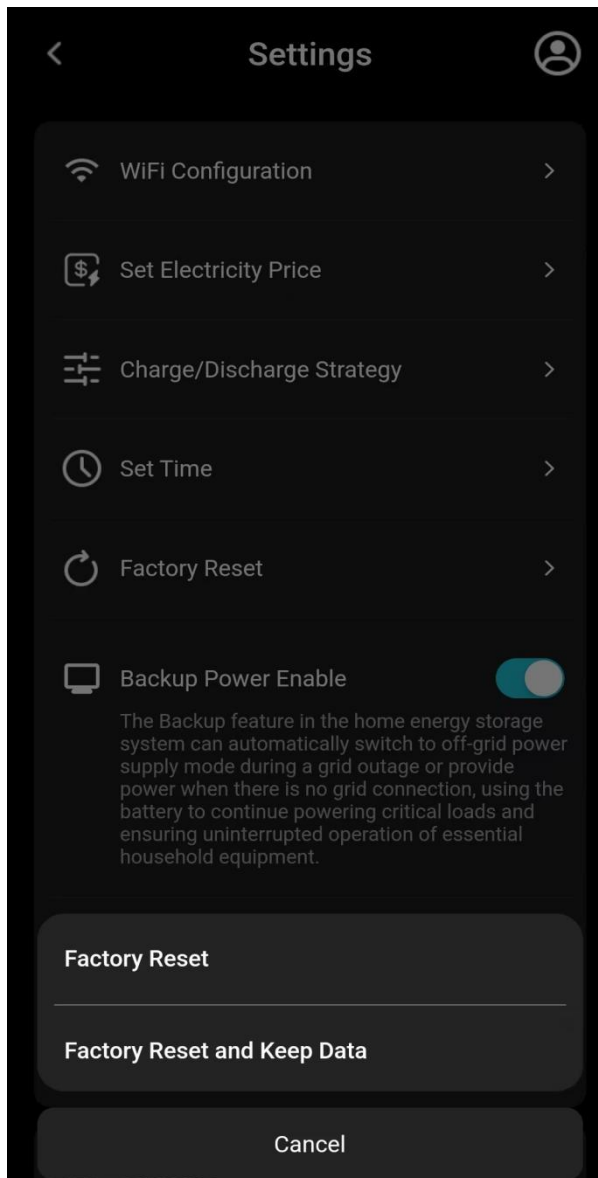

## 6. Grid Power Configuration

Two options available — **800W** or **2500W**. The selected value determines the maximum discharge power limit.

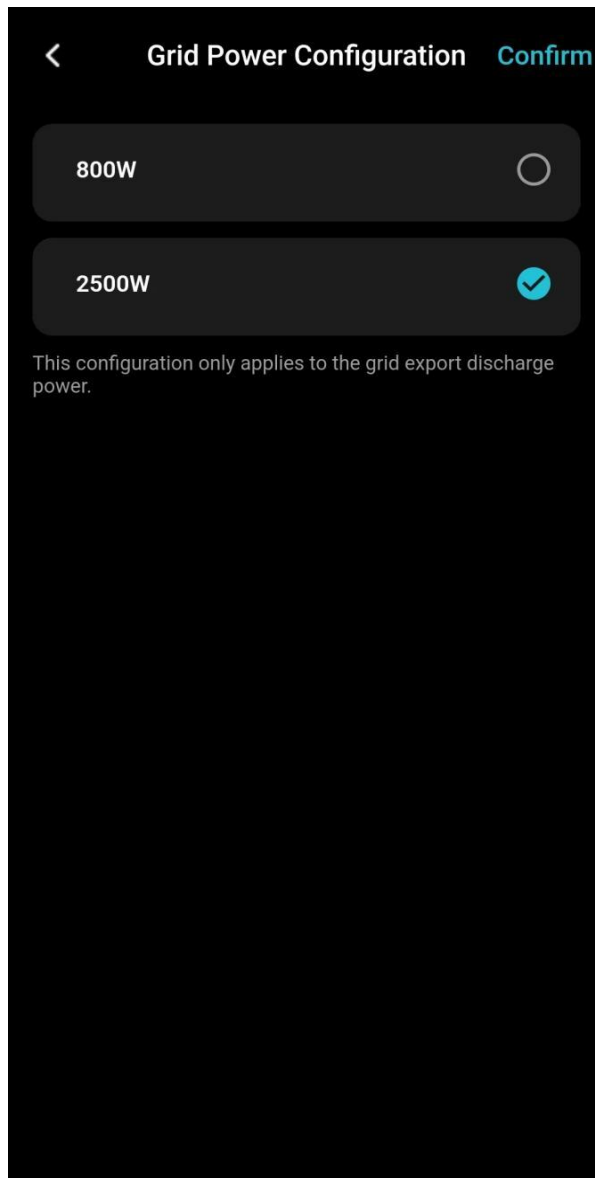




## 7. Firmware Upgrade & Communication Module Upgrade


When a new version is available, a red dot prompt will appear. Tap Upgrade then wait for upgrade to complete

- **Firmware Upgrade:** Requires Bluetooth connection.
- **Communication Module Upgrade:** Can be performed via Bluetooth or Wi-Fi

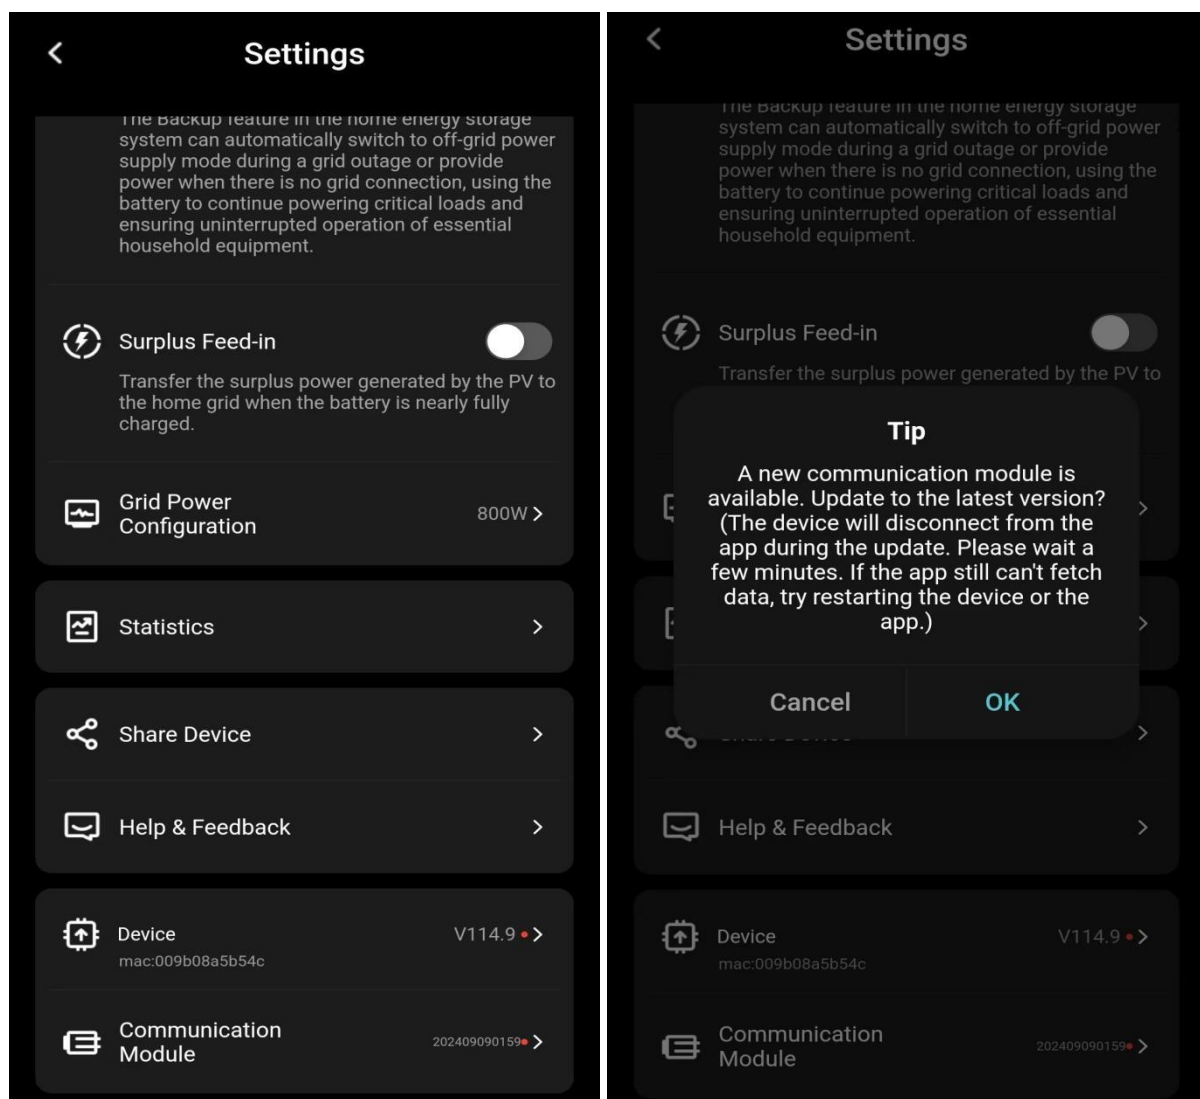

## 8. Device Sharing

- **View Only:** Invited user can view device status only.
- **Controllable:** Invited user can view and control device operations.

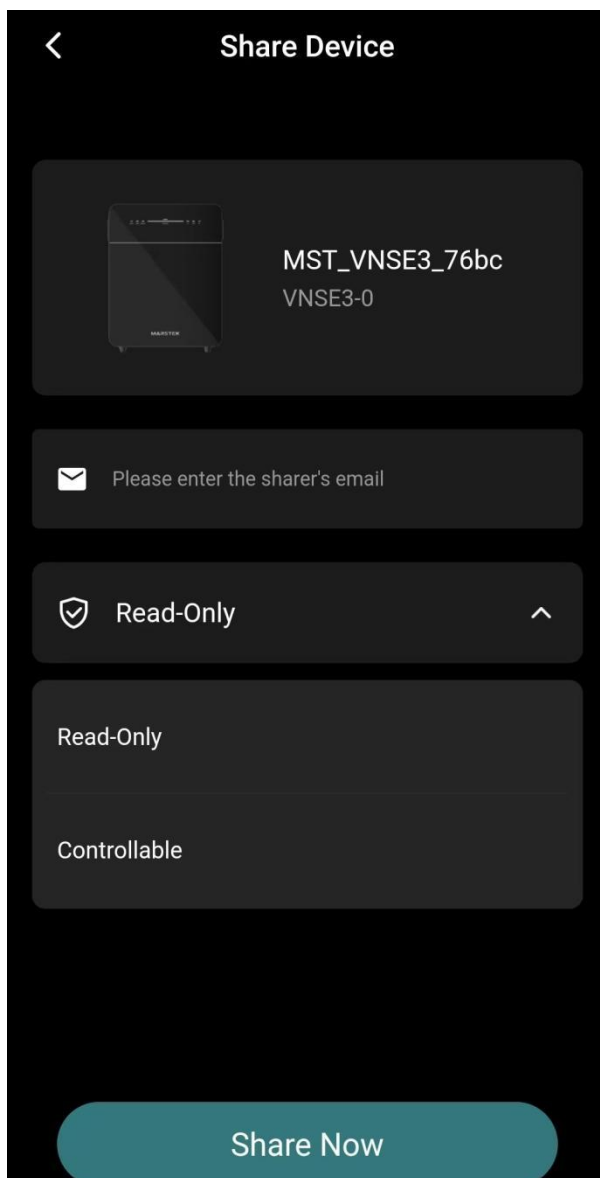

The screenshot shows a mobile application interface for sharing a device. At the top, there is a back arrow and the title "Share Device". Below this, a device card displays a small image of a device and the text "MST\_VNSE3\_76bc" and "VNSE3-0". Underneath the device card is a text input field with an envelope icon and the placeholder text "Please enter the sharer's email". Below the input field is a section for permissions, starting with a shield icon and the text "Read-Only", followed by an upward-pointing chevron. This section contains two radio button options: "Read-Only" and "Controllable". At the bottom of the screen is a large teal button labeled "Share Now".

## 9. Help & Feedback

You can read help documents for your device here or submit feedback to us. If you want to report an issue:

- Select the problem type of your device.
- You can write up to 500 words to shortly describe your problem.
- You can add images, or videos in PNG, JPG and MP4 format to help you describe your problem.
- All submitted feedback will be displayed in the feedback history.

